


Steel Cage Fencing  
Gates  
Barrier Gates  
Turnstiles  
Tripod Turnstiles

**adronit®**  
*...for safety's sake!*

**Adaptable, protective and economical**



Now with  
**25 year warranty**  
on powder-coated  
fence



**Steel Cage Fence MIDI**

# Steel Cage Fence MIDI

**adronit®**  
...for safety's sake!



5


**protective**

5. One-sided angled extension



6

6. Fence in low terraces

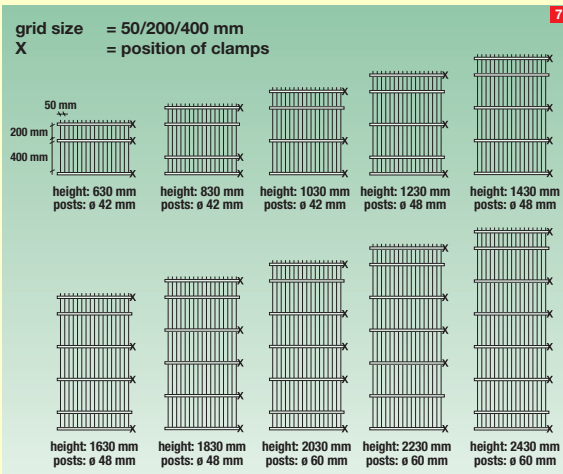

7

7. Fence heights and grid sizes

**economical**

## The classic one

MIDI closes the gap between the traditional chain-link fence and the solid, high-quality steel cage fence TOP by adronit®. MIDI is the well-established economical alternative. With a grid size of 50/200/400 mm and round rods of a diameter of 5 mm it cuts a very good figure. The MIDI panels can be raked to suit ground slopes by using different fasteners.

## Choice of colours

Every RAL colour desired can be delivered, for example the colours corresponding to your corporate design.

## Range of application

Enclosing

- commercial grounds
- private grounds
- public grounds

according to latest standards of manufacture.

## Design features

### Posts:

Very attractive round posts of a diameter of 42, 48 or 60 mm. Roof-shaped caps. For fences in need of repair existing posts can be utilised.

### Fence panels:

The MIDI fence panels are made of perforated, horizontal, U-shaped cold rolled section 9/20/9/2 mm. Distance between the U-shaped sections 200/400 mm. Standard distance

between the round rods 50 mm, diameter of the round rods 5 mm. Due to the round rods being positioned off-centre and due to the different grid size, unauthorised scaling is considerably more difficult. At every point of intersection, the vertical round rods are welded to the U-shaped section. Available heights from 630 to 2,430 mm. For better corrosion protection, the U-shaped sections are rounded on top.

### Fastenings:

The panels are joined together with stainless steel bolts or rivets. They are secured to the posts with special non-slip clamps. To reduce noise transmission, plastic spacers are used with each clamp. All nuts are self-locking.

**adaptable**

### Top edge:

Enclosures for schools and nursery schools must not have points, protruding sharp edges or barbed wire up to a height of 2 m. The fence has to have a minimum height of 1 m. (According to local authority association guide lines.)

Otherwise the vertical rods can optionally finish flush with the top edge, protrude approximately 15 mm or be sharpened to points.

Detailed information:

**Adronit GmbH & Co. KG**  
- Security Systems -

Oberwengener Str. 204  
58300 Wetter (Ruhr), Germany  
Internet: www.adronit.de

Telephone +49 23 35 97 85-0  
Telefax +49 23 35 7 22 58  
E-Mail: info@adronit.de



### 25 year warranty by adronit®

Adronit ensures a 25 year warranty on powder-coated fences.



### adronit TRIPLEX<sup>PLUS</sup>® Complete corrosion protection

Guaranteed triple protection: Hot dip galvanised plus powder primer coating and powder top coating, guaranteeing permanent protection against the weather.



### Quality control according to EN ISO 9001

The TÜV-certificate documents our high standard of manufacture, ensuring full control at all stages of production.

The information contained in this brochure is not binding. Definitive information on design and scope of delivery can be found in the technical specifications in our offers. Technical details are subject to alterations.