



# OB.350

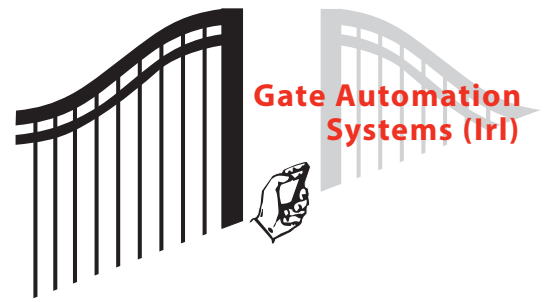

Gate Automation Systems (Irl)

## ELECTRO-MECHANICAL, HEAVY DUTY SUB TERRAIN OPERATOR

*Components submerged in oil bath*

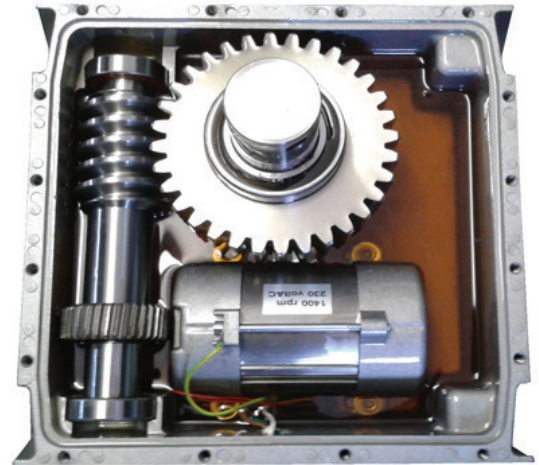

### FEATURES

- 20 year guarantee
- Waterproof operator with reduction unit in oil bath
- Mechanical components made of steel / stainless steel
- All mechanical components self-lubricate in oil bath to ensure reliability and longevity
- Self-locking electromechanical operator
- 230 Vac
- Suitable for large gates – up to 4m per leaf
- Foundation boxes hot dipped galvanized
- Adjustable mechanical stops for open/close
- 180° opening on request

### 230 VAC CONTROL PANEL

- Control panel for 1 or 2 motors
- Step by step input
- Electronic force adjustment
- Diagnostics LCD display
- Built in 433.93Mhz radio receiver
- Electronic adjustment of torque and operating times for each motor
- Separate limit switch inputs to open/close each motor
- Separate slow down during open/close for each motor
- 8.2 Kohm safety edge input
- View actual number of cycles counter
- Programming access password

TECHNICAL DATA	OB.350
Power supply	230 Vac (50-60Hz)
Motor supply	230 Vac
Max absorbed current	1.7 A
Torque	370 Nm
Opening time	16"
Operation cycle	Intensive use
Protection level	IP67
Encoder	NO
Operating temperature	-20°C /+50°C
Leaf max dimension	4 m
Lubrication	OIL
Weight	20.3 kg



Terms & Conditions apply